

## 5654 CLEM

Lightbars can be ordered in four length. Can be installed individually or as a continuous line.

With very extensive asymmetric lenses, uniform illumination is produced with raking positioning.


### APPLICATIONS:

- Highlight architectural features,
- Facade lighting from a belt-course
- Continuous line
- Direct or indirect lighting of public space
- Underpass

### CARACTERISTICS

Length = 525 mm

- Vandalproof profiled organic glass
- Various mounting accessories possible (fixed or adjustable)
- RGBW options available

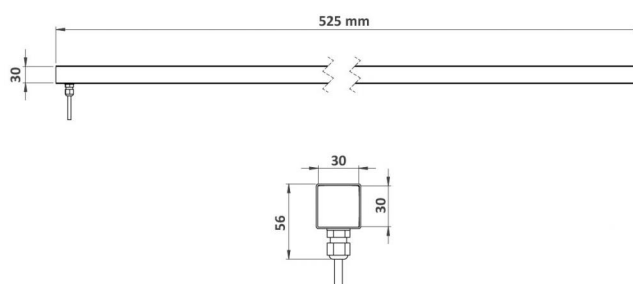

Number of LEDs	6
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5654-clem-r2440>

### APPLICATION



#### Outdoor lighting

Standard flux : **1338 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



#### Wall lights

### CARACTERISTICS

Weight : **300 g**

### Options of luminous effects



RGBW option



Adjustable on 1 axis



Rotating beam



Beam with various openings



Transparent flat window



Colour control system (optional)

### Power supply - Control



Cable length: **1 m**



**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

### Material



Vandalism-proof, UV-proof, polycarbonate window

### Mechanical strength - Waterproofness

**IK06** Resists impacts up to IK06

**IP67** Tight for temporary immersion

## 5654 CLEM

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5654-clem-r2440>

