

1830KD LUCERNE

«Medium» version in the round flush recessed raking light range. Choice of lighting effects for customised LED marker-lighting.

APPLICATIONS:

- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs
- Public space enhancement

CARACTERISTICS

Projector equipped with a stainless steel flange of Ø 120 mm with a 4 mm thick protusion.


The flange hides recess plate imperfections.

Dome

This projector 1830K does not withstand occasional vehicles driving.

- Anodised aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1830K and 1830D)

- RGB options available

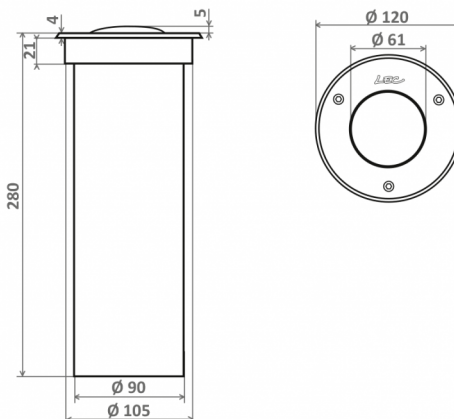

| | |
|----------------|---|
| Number of LEDs | 36, 12 |
| Type of LEDs | 120° SMD LEDs (S), SMD trichro (A) |
| Color(s) | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1830kdz-lucerne-r2492>

APPLICATION

- Marker-lighting

CONFIGURATEUR.EMPLACEMENT

- Ground recessed fittings

CARACTERISTICS

Weight : 450 g

Options of luminous effects

- RGB options
- Adjustable on 1 axis
- Frosted dome (optional)
- Colour control system (optional)

Power supply - Control

- Cable length: 1 m
- Integrated : 24V-PWM
- Remote : 24V-0/10V, 24V-DMX, 24V-DALI
- Integrated : 230V-Non dimmable

Material

- AL Anodised glazed aluminium
- 316L 316L Stainless steel
- PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- IK10 Resists impacts up to IK10
- 60J 60J
- IP68 Tight for extended immersion