

6430 PARC

Light bollard for illuminating paths
Special H30 and H60 lenses Cycle
paths and pedestrian paths
lighting, at large intervals (more
than 6m).

Beam tiltable (+/-30°) without
without opening the fitting or
compromising its water resistant.


Bollard version of wall-recessed
4330.

APPLICATIONS:

- Cycle paths and pedestrian
paths lighting
- Monuments lighting

CARACTERISTICS

- 316 stainless steel body,
1.5mm thick, powder-coated in
your choice, RAL of your choice
- Vandalproof 316L stainless
steel screws
- Standard height 70cm. Other
heights on request

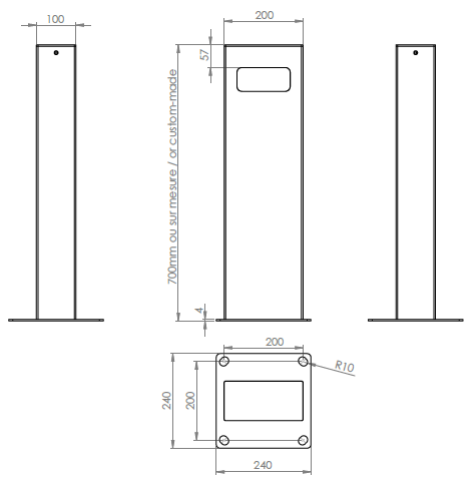

Number of LEDs	3, 4
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering
technical criteria at the following link:

<http://www.lec-lyon.com/6430-parc-r298>

APPLICATION



Outdoor lighting

Standard flux : **892 lm**

*This value is gained from the optimum
output of the LED number, inclusive of
optic, for a cool white LED (6000K)*

CONFIGURATEUR.EMPLACEMENT



Bollards

CARACTERISTICS

Weight : **1060 g**

Options of luminous effects

- faisceau incliné bas
- Adjustable on 1 axis
- Beam with various openings
- Transparent flat window

Power supply - Control



Cable length: **1 m**

Integrated : 24V-Non
dimable, 24V-PWM
Remote : 24V-0/10V, 24V-
DMX, 24V-DALI

Integrated : 230V-Non
dimable

Material

- Anodised glazed aluminium
- Vandalism-proof, scratch-
proof, UV-proof,
polycarbonate window, M2

Mechanical strength - Waterproofness

- IP69** pressure water spray
K (previous registration)
- IK10** Resists impacts up to IK10
20J
- IP67** Tight for temporary
immersion
- Adjustable orientation
without dismantling

6430 PARC

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/6430-parc-r298>

