


## 1810B SAVOIE

### CARACTERISTICS

Fitted with a connecting box with one or two cable glands for in-line connection.

- Organic glass lens
- Stainless steel mirror back
- Aerodynamic shape to reduce particle deposits and permit easy cleaning with water.
- Materials unaffected by corrosive atmosphere in tunnels
- Beams angled 45°
- Fireproof safety cable CR1-C1 optional

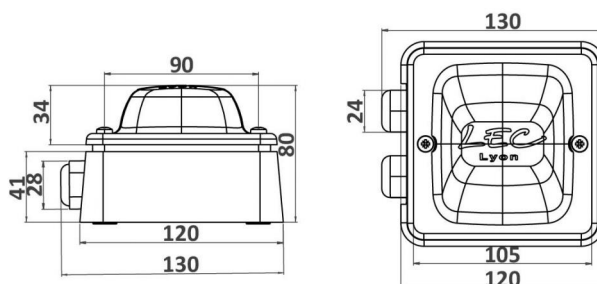

Number of LEDs	24
Type of LEDs	Wide angle 5 mm LEDs (H)
Color(s)	Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:  
<http://www.lec-lyon.com/1810bz-savoie-r848>

### APPLICATION

- ☒ Marker-lighting

### CONFIGURATEUR.EMPLACEMENT

- ☒ Wall lights

### CARACTERISTICS

#### Options of luminous effects

- ☒ Non adjustable
- ☒ Inclined beam
- ☒ Paralell beam
- ☒ Transparent flat window

#### Power supply - Control

- ☒ Cable length: 1 m
- ☒ Integrated : 24V-PWM  
Remote : 24V-0/10V, 24V-DMX, 24V-DALI
- ☒ Integrated : 230V-Non dimmable

#### Material

- ☒ PC 1 Vandalism-proof, UV-proof, polycarbonate window

#### Mechanical strength - Waterproofness

- ☒ IP69 K pressure water spray (previous registration)  
Certified in compliance with European Standards 60598-2-22 for emergency lighting units
- ☒ IK10 40J Resists impacts up to IK10 40J
- ☒ IP67 Tight for temporary immersion