

1530RH BORDEAUX

«Mini» version in the round flush recessed raking light range. The flange hides recess plate imperfections.
RGB option available.


APPLICATIONS:

- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs,...
- Public space enhancement

CARACTERISTICS

Uniform window

- Colourless anodised machined aluminium body (except 1530RX)
- Vandalproof organic glass window
- Recess in or attach to walls, bollards, poles or other supports.

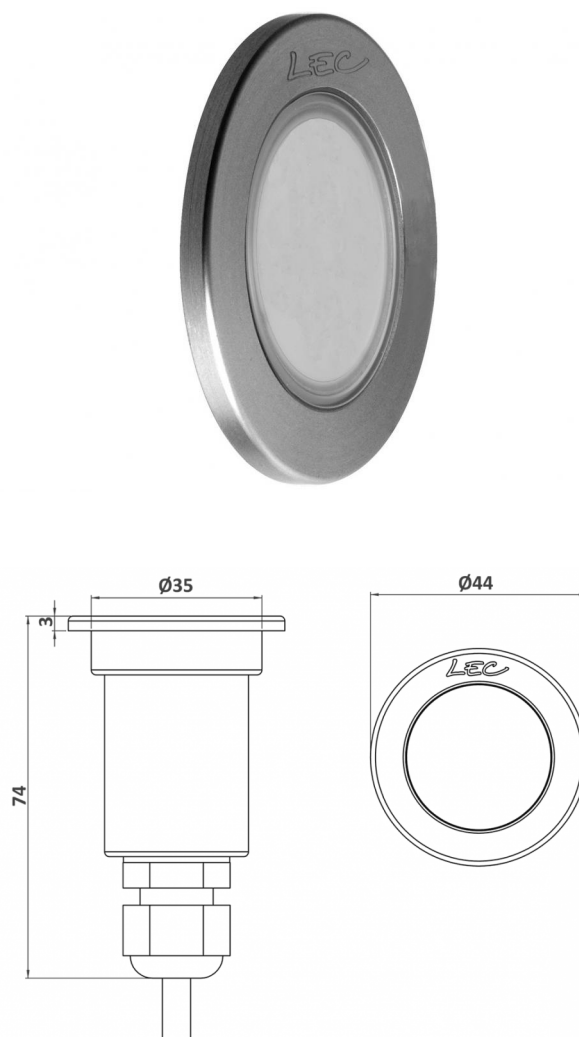

Number of LEDs	3, 1
Type of LEDs	120° SMD LEDs (S), Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/1530rhz-bordeaux-r968>

APPLICATION

- ☒ Marker-lighting

CONFIGURATEUR.EMPLACEMENT

- ☒ Wall recessed
- ☐ Pavements sides
- ☐ Masts

CARACTERISTICS

Weight : 125 g

Options of luminous effects

- ☒ RGB options
- ☒ Non adjustable
- ☐ Flat homogeneous window (optional)
- ☐ Transparent flat window
- ☐ Colour control system (optional)

Power supply - Control

☒ Cable length: 1 m

☒ Integrated : 24V-PWM
☒ Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

- ☒ AL Anodised glazed aluminium
- ☒ PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- ☒ IK10 Resists impacts up to IK10
- ☒ 60J 60J
- ☒ IP68 Tight for extended immersion