


5630 BELVAL

Handrail spotlight with invisible-screw recessing unit Wide choice of lenses including:
Very extensive asymmetric versions to ensure beam uniformity with intervals of up to 7m
Tilted beam to have tilted output even when the fitting is installed vertically to hide the light source

APPLICATIONS:

- Cycle paths and pedestrian paths lighting
- Roadway lighting
- Handrail
- Footbridge
- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- Flush-recessed
- 2 possible recess profiles

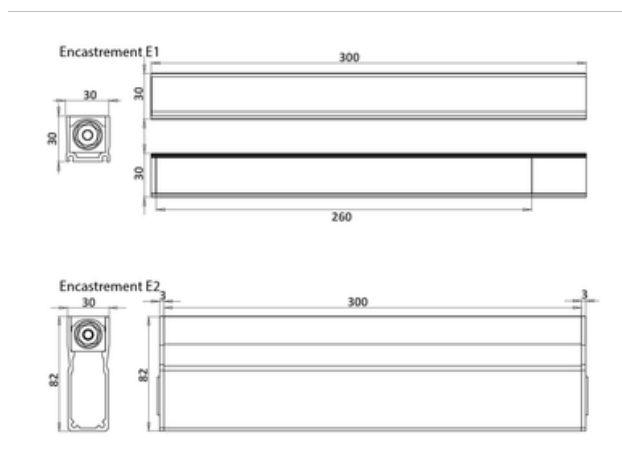

AVAILABLE OPTIONS

Number of LEDs	6
Type of LEDs	Power LEDs 1 Watt (B)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/5630-belval-r101>


APPLICATION


 Outdoor lighting

Standard flux : **371 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

MOUNTING TYPE

 Wall recessed

 Handrails

CHARACTERISTICS


 Weight : **370 g**


 Eco Design


Options of luminous effects


 RGB options

 20° deflected beam (option)


 Non adjustable

 Beam with various openings


 Transparent flat window


 Colour control system (optional)

Power supply - Control

 Cable length: **1 m**

Material

 Anodised glazed aluminium

 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

IK10 20J Resists impacts up to 20 joules (IK10)

IP67 Tight for temporary immersion

5630 BELVAL

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5630-belval-r101>

