


1810 SAVOIE

- Organic glass lens
- Stainless steel mirror back
- Aerodynamic shape to reduce particle deposits and permit easy cleaning with water.
- Materials unaffected by corrosive atmosphere in tunnels
- Beams angled 45° (1810) or straight (1810A) recommended for blue interval LEDs.
- Fireproof safety cable CR1-C1 optional

Fixing by sides ears (1810C)

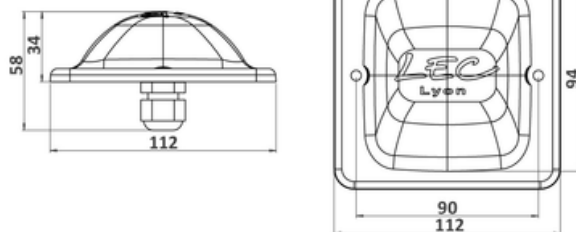

AVAILABLE OPTIONS

Number of LEDs	48
Type of LEDs	Wide angle 5 mm LEDs (H)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/1810z-savoie-r122>

APPLICATION

- Marker-lighting

MOUNTING TYPE

- Wall lights

CARACTERISTICS

- Weight : 250 g

Options of luminous effects

- Non adjustable
- Inclined beam
- Paralell beam
- Transparent flat window

Power supply - Control

- Cable length: 1 m

Integrated : 24V-PWM
 Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

- PC 1** Vandalism-proof, UV-proof, polycarbonate window

Mechanical strength - Waterproofness

- IP69 K** pressure water spray (previous registration)

E N Certified in compliance with European Standards 60598-2-22 for emergency lighting units

- IK10 40J** Resists impacts up to 40 joules (IK10)

- IP67** Tight for temporary immersion