

5623UX BRUNEI

Recessed lightbar for public spaces. Length on request (max = 2000mm, min = 150mm), can be installed individually or as a continuous line. Clips in with no screws for vandal-proof installation.



APPLICATIONS:

- Decorative or safety marker-lighting for public spaces
- Highlight facades

DMX control with lightbar configuration after installation.
Uniform window

- Vandalproof profiled organic glass
- Colourless anodised aluminium profile (except 5620X)
- Recessed
- 2 Profiled mounts with extruded-aluminium accessories for continuous line or individual installation.
 - Ground-recessed version with internal space for running cable and connectors
 - Compact surface-mounted
- Version RGB options available

80 leds/m for RGB et 120 leds/m for Mono

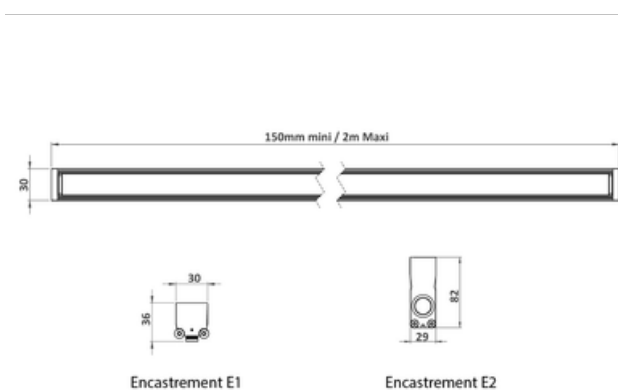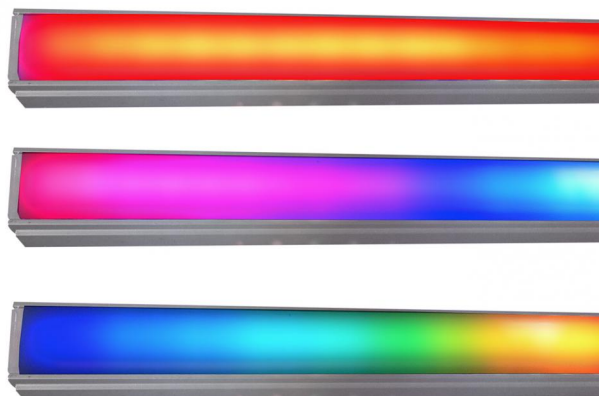

AVAILABLE OPTIONS

Number of LEDs	120, 80
Type of LEDs	120° SMD LEDs (S), SMD trichro (A)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/5623uxz-brunei-r2390>

APPLICATION

- Marker-lighting

MOUNTING TYPE

- Wall recessed
- Ground flush recessed fittings
- Ground recessed fittings
- Pavements sides
- Masts
- Handrails

CARACTERISTICS

- Weight : 730 g/m

Options of luminous effects

- RGB options
- Non adjustable
- Beam with various openings
- Flat homogeneous window (optional)
- Colour control system (optional)

Power supply - Control

- Cable length: **Connector**

Material

- Anodised glazed aluminium
- Vandalism-proof organic glass

Mechanical strength - Waterproofness

- Withstands random all vehicles traffic
- IK10 60J** Resists impacts up to 60 joules (IK10)
- IP68** Tight for extended immersion