

5630 BELVAL

Handrail spotlight with invisible-screw recessing unit Wide choice of lenses including:
Very extensive asymmetric versions to ensure beam uniformity with intervals of up to 7m
Tilted beam to have tilted output even when the fitting is installed vertically to hide the light source




APPLICATIONS:

- Cycle paths and pedestrian paths lighting
- Roadway lighting
- Handrail
- Footbridge

CARACTERISTICS

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- Flush-recessed
- 2 possible recess profiles
- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- Flush-recessed
- 2 possible recess profiles
- RGB options available

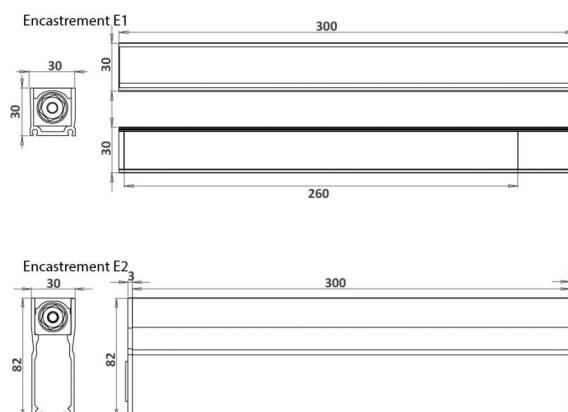

Number of LEDs	6
Type of LEDs	Power LEDs 1 Watt (B)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/5630-belval-r101>



APPLICATION

Outdoor lighting

Standard flux : **518 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)







CONFIGURATEUR.EMPLACEMENT

-  Wall recessed
-  Handrails



CARACTERISTICS

Weight : **370 g**



Options of luminous effects

-  RGB options
-  20° deflected beam (option)
-  Non adjustable
-  Beam with various openings
-  Transparent flat window
-  Colour control system (optional)

Power supply - Control

-  Cable length: **0.2m**
-  **Integrated** : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

-  Anodised glazed aluminium
-  Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- IK10** Resists impacts up to IK10
- 20J**
- IP67** Tight for temporary immersion

5630 BELVAL

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5630-belval-r101>

