


## 1406 ALMA

### CARACTERISTICS

360° uniform beam angle (0 to -20°).

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Attaches directly to roadway or to recess plate (not available in 230V version)
- Supports occasional road traffic by any type of vehicle

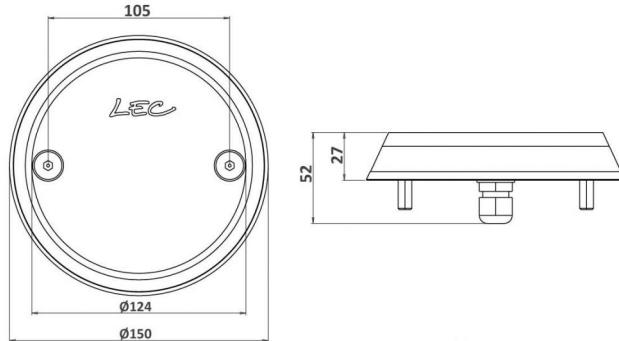

Number of LEDs	6
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1406z-alma-r1029>

### APPLICATION

- Marker-lighting

### CONFIGURATEUR.EMPLACEMENT



Wall lights



Ground recessed fittings

### CARACTERISTICS

Weight : 780 g

### Options of luminous effects



faisceau incliné bas



Non adjustable



Transparent flat window

### Power supply - Control



Cable length: 1 m



Integrated : 24V-Non dimmable, 24V-PWM  
 Remote : 24V-0/10V, 24V-DMX, 24V-DALI



Integrated : 230V-Non dimmable, 230V-0/10V

### Material



AL Anodised glazed aluminium



VO Vandalism-proof organic glass

### Mechanical strength - Waterproofness



Protrusion which is an obstacle for 2-wheels vehicles and pedestrians. The unit should be permanently lit to draw attention to the obstacle.



Withstands random all vehicles traffic



IK10 20J Resists impacts up to IK10 20J



IP67 Tight for temporary immersion