


0320L MATOSINHOS

CARACTERISTICS

- Vandalproof organic glass body
- Push-fit Ø 17.5 mm diameter
- 1 x 5 mm LED

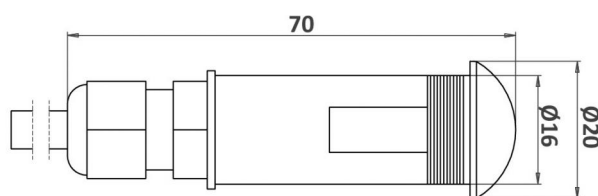

APPLICATION

-  Marker-lighting

CONFIGURATEUR.EMPLACEMENT

-  Wall recessed
-  Masts

CARACTERISTICS

Weight : 70 g

Options of luminous effects

-  Non adjustable
-  Frosted dome (optional)

Power supply - Control

-  Cable length: 1 m
-  Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

-  Vandalism-proof, UV-proof, polycarbonate window

Mechanical strength - Waterproofness

- IK10** Resists impacts up to IK10
- 20J** 20J
- IP68** Tight for extended immersion

Number of LEDs	1
Type of LEDs	Wide angle 5 mm LEDs (H)
Color(s)	Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/0320lz-matosinhos-r1030>