

4330 SAINT-JEAN

Recessed spotlight for path lighting to be placed at less than one metre above ground.

Special H30 and H60 lenses Cycle paths and pedestrian paths lighting, at large intervals (more than 6m). Tiltable beam (+/-30°) without opening the spotlight.


Wall version of the 6430 bollard.

APPLICATIONS:

- Cycle paths and pedestrian paths lighting
- Stair lighting
- Monuments lighting

CARACTERISTICS

- Anodised aluminium body
- Colourless anodised machined aluminium frame
- Vandalproof organic glass window
- Thermolacquered paint on frame on request

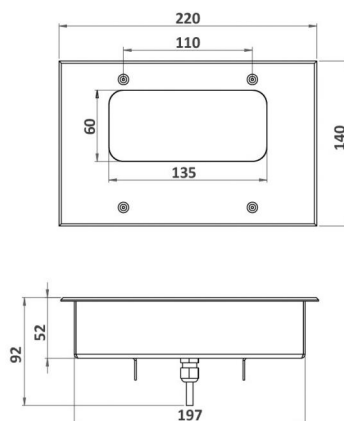

Number of LEDs	3, 4
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/4330-saint-jean-r109>

APPLICATION



Outdoor lighting

Standard flux : **892 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Wall recessed

CARACTERISTICS

Weight : **2080 g**

Options of luminous effects



Adjustable on 1 axis



Rotating beam



Beam with various openings



Transparent flat window

Power supply - Control



Cable length: **1 m**



Integrated : 24V-Non dimmable, 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI



Integrated : 230V-Non dimmable

Material



AL Anodised glazed aluminium



316L 316L Stainless steel



PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness



IK10 20J Resists impacts up to IK10 20J



IP67 Tight for temporary immersion



IP Adjustable orientation without dismantling

4330 SAINT-JEAN

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/4330-saint-jean-r109>

