

5633 ARCHES

This compact linear spotlight is designed to be installed on a windowsill or facade belt-course. Fitted with an 100x12° lens, the uprights and lintel of the windowframe will be illuminated without emitting any unwanted beams.


For installation on an architectural belt-course, the choice of available lenses allows upward converging beams or uniform wall-washing of the facade despite being installed very close to the facade.

APPLICATIONS:

- Windowframe lighting
- Wallwashing
- Architectural heritage enhancement
- Path lighting
- Direct or indirect lighting of public space

CARACTERISTICS

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Thermolacquered paint on request
- RGB options available

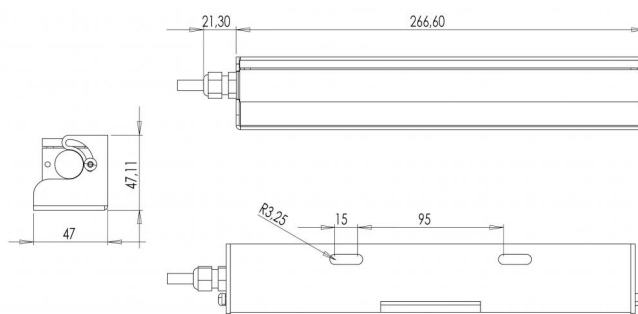

Number of LEDs	6
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5633-arches-r110>

APPLICATION



Outdoor lighting

Standard flux : **1338 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Wall lights

CARACTERISTICS

Weight : **430 g**

Options of luminous effects



RGB options



Adjustable on 1 axis



Rotating beam



Beam with various openings



Transparent flat window



Colour control system (optional)

Power supply - Control



Cable length: **1 m**



Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material



Anodised glazed aluminium



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness



IK10 Resists impacts up to IK10
20J



IP67 Tight for temporary immersion

5633 ARCHES

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5633-arches-r110>

