

1530RDS **BORDEAUX**

«Mini» version in the round flush recessed raking light range. The flange hides recess plate imperfections. RGB option available.

APPLICATIONS:


- · Decorative or safety markerlighting
- Installed at regular intervals to mark a path, cycle path, stairs,...
- Public space enhancement

CARACTERISTICS

Frosted dome

- · Colourless anodised machined aluminium body (except 1530RX)
- Vandalproof organic glass window
- Recess in or attach to walls, bollards, poles or other supports.



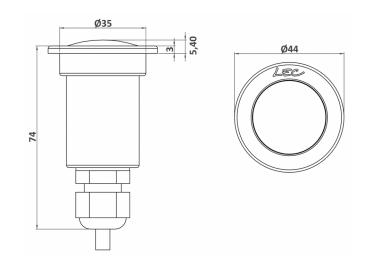

Number of LEDs	3, 1
Type of LEDs	$120^{\rm o}{\rm SMD}{\rm LEDs}$ (S), SMD trichro (A), Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

http://www.lec-lyon.com/1530rdsz-bordeaux-r1256

APPLICATION

Marker-lighting

CONFIGURATEUR.EMPLACEMENT



Wall recessed



Masts

CARACTERISTICS

Weight : 125 g

Options of luminous effects



RGB options



x Non adjustable




Frosted dome (optional)



Colour control system (optional)

Power supply - Control



Integrated: 24V-PWM Remote: 24V-0/10V, 24V-DMX, 24V-DALI

Material



(AL) Anodised glazed aluminium

Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness IK10 Resists impacts up to IK10

Tight for extended IP68 immersion