

5655G LIGNON

Custom length lightbar (max 2m) for individual or continuous line installation for an uninterrupted effect. Minimum length = 100mm


APPLICATIONS:

- Highlight architectural features,
- Lighting from a cornice
- Under bench lighting
- Continuous line

CARACTERISTICS

Lateral bolts for screwing onto fixed or adjustable installation accessories.

- Vandalproof profiled organic glass
- Colourless anodised aluminium sheath
- Optional lateral mounting studs accessories (fixed or swivelling)
- RGB options available

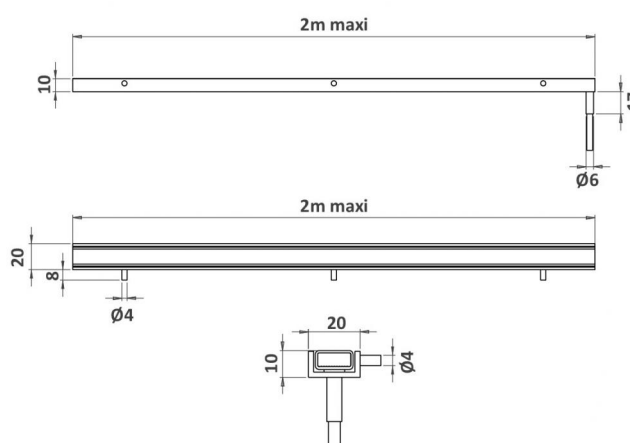

Number of LEDs	120
Type of LEDs	120° SMD LEDs (S), 120° high intensity SMD LEDs (Z)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5655g-lignon-r1938>

APPLICATION

Outdoor lighting

Standard flux : **1452 lm**


This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT

Wall lights

CARACTERISTICS

Weight : **300 g/m**




Eco Design

Options of luminous effects



RGB options






Non adjustable




Transparent flat window

Power supply - Control

 Cable length: **0.2 m**

 **Integrated** : 24V-PWM
 **Remote** : 24V-0/10V, 24V-DMX, 24V-DALI

Material

 Anodised glazed aluminium

Mechanical strength - Waterproofness

IK06 Resists impacts up to IK06

IP66 product.legend-immersion.66

5655G LIGNON

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5655g-lignon-r1938>

