
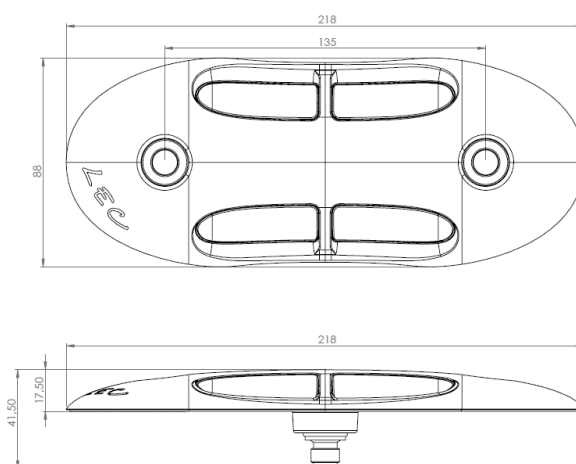


1844CR1 SAINT RAPHAEL

CARACTERISTICS

Fireproof safety cable CR1-C1

- Cast aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Attaches directly to roadway or to recess plate

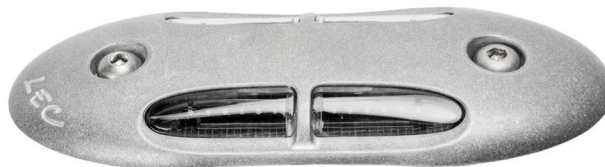

| | |
|----------------|--|
| Number of LEDs | 24 |
| Type of LEDs | Wide angle 5 mm LEDs (H) |
| Color(s) | Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L) |


Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1844cr1z-saint-raaphael-r2124>

APPLICATION

-  Marker-lighting




CONFIGURATEUR.EMPLACEMENT

-  Ground recessed fittings


CARACTERISTICS



Weight : 570 g

Options of luminous effects


-  Non adjustable
-  Paralell beam
-  Transparent dome (optional)

Power supply - Control



-  Cable length: 2 m CR1

 **Integrated :** 24V-PWM
 **Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

Material

-  Marine anodised cast aluminium

Mechanical strength - Waterproofness

- IP69 K** pressure water spray (previous registration)
 Protrusion which is an obstacle for 2-wheels vehicles and pedestrians. The unit should be permanently lit to draw attention to the obstacle.
-  Withstands low-speed light vehicles traffic
-  Certified in compliance with European Standards 60598-2-22 for emergency lighting units
- 2,5T** Resists compression up to 2,5 tons
- IK10 60J** Resists impacts up to IK10 60J
- IP68** Tight for extended immersion