



1844CR1

SAINT RAPHAEL

CARACTERISTICS

Fireproof safety cable CR1-C1

- Cast aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Attaches directly to roadway or to recess plate

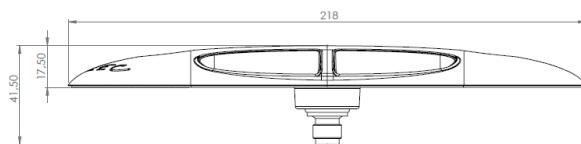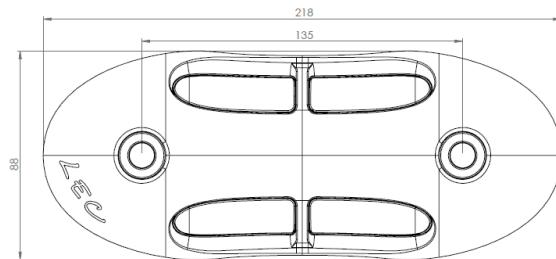

Number of LEDs	24
Type of LEDs	Wide angle 5 mm LEDs (H)
Color(s)	Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/1844cr1z-saint-raphael-r2124>

APPLICATION

- Marker-lighting

CONFIGURATEUR.EMPLACEMENT

- Ground recessed fittings

CARACTERISTICS

Weight : 570 g

Options of luminous effects

- Non adjustable
- Paralell beam
- Transparent dome (optional)

Power supply - Control

Cable length: 2 m CR1

Integrated : 24V-PWM
 Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

- Marine anodised cast aluminium

Mechanical strength - Waterproofness

- IP69 pressure water spray (previous registration)
K Protrusion which is an obstacle for 2-wheels vehicles and pedestrians. The unit should be permanently lit to draw attention to the obstacle.

- Withstands low-speed light vehicles traffic

- Certified in compliance with European Standards 60598-2-22 for emergency lighting units

- 2,5T Resists compression up to 2,5 tons

- IK10 60J Resists impacts up to IK10 60J

- IP68 Tight for extended immersion