

## 5781 PASSY

Linear spotlight for recessing in public spaces. Can be ordered in two lengths, installed individually or as a continuous line. Externally adjustable tiltable LED plate (0° to 25°) without opening the fitting or compromising its water resistant. Device swivels in its recess for the opposite direction. Clips in with no screws for vandal-proof installation.


### APPLICATIONS:

- Medium height facade lighting (10m)
- Highlight architectural features, street furniture, trees...
- Squares and public spaces

### CARACTERISTICS

Length = 1 m

- Colourless anodised aluminium body
- Vandalproof organic glass window
- Flush-recessed
- Extruded aluminum profiled recess plate and accessories for continuous line or independent installation
- Cavity in the recess for running the cable and connectors
- Withstands occasional traffic from all kinds of vehicles
- RGBW options available
- anti-glare option available

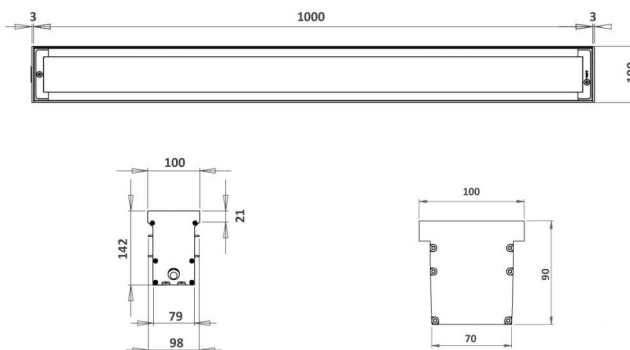

Number of LEDs	32
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5781-passy-r2432>

### APPLICATION

#### Outdoor lighting

Standard flux : **7136 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT

- Ground flush recessed fittings
- Ground recessed fittings

### CARACTERISTICS

Weight : **6000 g**

### Options of luminous effects

- RGBW option
- Adjustable on 1 axis
- Rotating beam
- Beam with various openings
- Transparent flat window
- Colour control system (optional)

### Power supply - Control

- Cable length: **1 m**
- Integrated** : 230V-Non dimmable, 230V-0/10V, 230V-DMX, 230V-DALI

### Material

- Anodised glazed aluminium
- Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness

- Withstands random all vehicles traffic
- 4T** Resists compression up to 4 tons
- IK10 60J** Resists impacts up to IK10 60J
- IP68** Tight for extended immersion
- Adjustable orientation without dismantling

## 5781 PASSY

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5781-passy-r2432>

