

2855M METEOR

«Maxi» version in the round flush recessed raking light range.


APPLICATIONS:

- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs
- Public space enhancement

CARACTERISTICS

LEDs angled over mirror

- Colourless anodised aluminium body and flange
- Vandalproof organic glass window
- 316L Stainless steel screws
- Installs in dedicated recess plate
- RGB options available

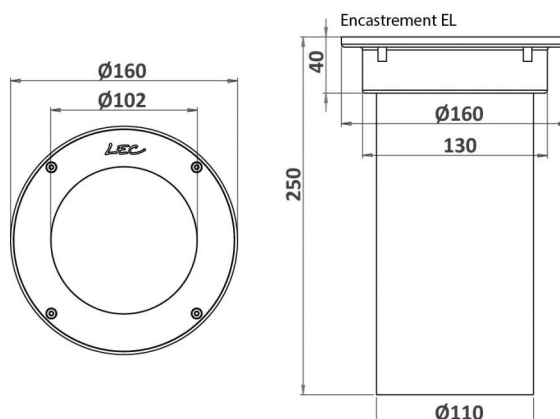

Number of LEDs	48
Type of LEDs	SMD trichro (A)
Color(s)	RVB (T)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec.fr/2855mz-meteor-r2451>

APPLICATION

- Marker-lighting

CONFIGURATEUR.EMPLACEMENT

- Ground flush recessed fittings
- Ground recessed fittings

CARACTERISTICS

Weight : 590 g

Options of luminous effects

- RGB options
- Non adjustable
- Transparent flat window
- Colour control system (optional)

Power supply - Control

- Cable length:
- Integrated** : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI
- Integrated** : 230V-Non dimmable

Material

- AL** Anodised glazed aluminium
- PC 2** Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- IK10** Resists impacts up to IK10
- 60J**
- IP68** Tight for extended immersion