

5637

OPERA

The OPERA light has a simple, discreet design and produces a beam that is almost 180°. It is powered by 24 V DC or 230 V AC and is available in input only or input/output version. It comes in a discreet black anodised finish or painted version (choice of colour). Designed to highlight architectural features thanks to its LED, the 5637 - OPERA offers a wide range of lighting effects.

With the 5637 - OPERA, you can choose one colour per light. Combined with a 180 x 4° lens, this makes it possible to accentuate architectural details with precision and finesse.

APPLICATIONS :




- Window surrounds
- Ceiling lights for tunnels and covered walkways
- Strips of light in the floor, ceiling or wall

CARACTERISTICS

- Black anodised aluminium
- 180 x 4° anti-glare silicone optical window
- 316L stainless steel screws
- Easy to install: factory-assembled cable-mounted connector(s) in input and input/output versions
- Powder-coated paint on request
- Option: trim plate untreated or painted (choice of RAL)



Modèle déposé
Registered Design

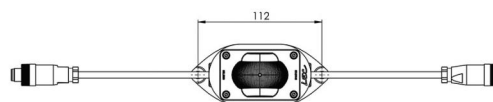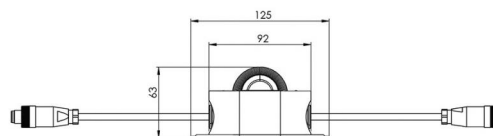

Number of LEDs	1
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5637-opera-r2614>

APPLICATION



Outdoor lighting

Standard flux : 223 lm

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Wall lights

CARACTERISTICS

Weight : 480 g

Options of luminous effects



Non adjustable

Power supply - Control



Cable length: 0.3m



Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI



Integrated : 230V-Non dimmable

Material



Anodised glazed aluminium



Vandalism-proof organic glass

Mechanical strength - Waterproofness



Resists impacts up to IK10
20J




Tight for temporary immersion

5637 OPERA

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5637-opera-r2614>

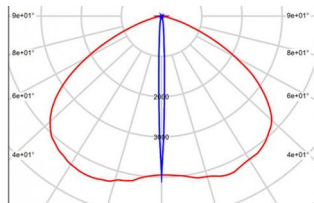

5637