

# 5713 **ALBI**

Small adjustable flush recessed 4 LED

"Mini" version of the adjustable recessed round light range

360° rotation of spotlight in its recessed housing to direct the light in the chosen direction without installation constraints Tiltable beam module (+30°/-10°)


#### **APPLICATIONS:**

- · Highlight architectural features, street furniture, landscape...
- · Uniform facade lighting

#### **CARACTERISTICS**

- · Anodised aluminium body
- · Colourless anodised machined aluminium flange
- Vandalproof organic glass window
- 316L stainless steel screws
- Flush recessed
- Withstands occasional road traffic by any vehicle type
- RGBW option available



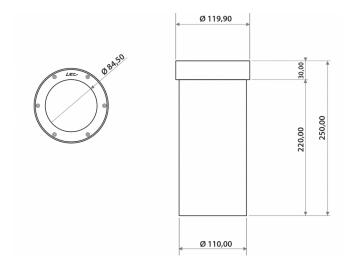

Number of LEDs	4
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

http://www.lec-lyon.com/5713-albi-r2645

### **APPLICATION**

Outdoor lighting

Standard flux: 892 lm

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

#### **CONFIGURATEUR.EMPLACEMENT**

Ground flush recessed fittings

Ground recessed fittings

### **CARACTERISTICS**

Weight: 960 g

#### **Options of luminous effects**

RGBW option

(2) Adjustable on 2 axis

Rotating beam

Beam with various openings

Transparent flat window

Colour control system (optional)

#### **Power supply - Control**

Cable length: 1m

Integrated: 24V-Non dimmable, 24V-PWM Remote: 24V-0/10V, 24V-DMX, 24V-DALI

Integrated: 230V-Non dimmable, 230V-DALI

#### Material

Anodised glazed aluminium

Vandalism-proof, scratchproof, UV-proof, polycarbonate window, M2

#### **Mechanical strength - Waterproofness**

Withstands random all vehicles traffic

Resists impacts up to IK10 **20**J 201

Tight for temporary



## **5713 ALBI**

This datasheet gives you all the available optics for this product, consistent with the number of LEDs. URL of this product: http://www.lec-lyon.com/5713-albi-r2645

