

## 4330B SAINT-JEAN

Recessed spotlight for path lighting to be placed at less than one metre above ground.

Special H30 and H60 lenses Cycle paths and pedestrian paths lighting, at large intervals (more than 6m). Tilttable beam (+/-30°) without opening the spotlight.


Wall version of the 6430 bollard.

### APPLICATIONS:

- Cycle paths and pedestrian paths lighting
- Stair lighting
- Monuments lighting

### CARACTERISTICS

- Anodised aluminium body
- Colourless anodised machined aluminium frame
- Vandalproof organic glass window
- Thermolacquered paint on frame on request

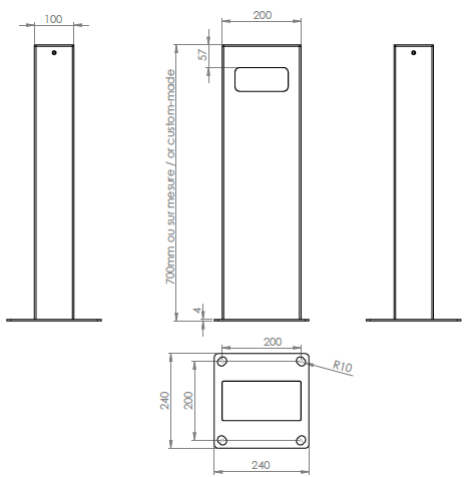

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:  
<http://www.lec-lyon.com/4330b-saint-jean-r2681>

### APPLICATION

#### Outdoor lighting

Standard flux : **892 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*





### CONFIGURATEUR.EMPLACEMENT

#### Bollards


### CARACTERISTICS

Weight : **8300 g**


### Options of luminous effects

-  faisceau incliné bas
-  Adjustable on 1 axis
-  Beam with various openings
-  Transparent flat window



### Power supply - Control

 Cable length: **1 m**

**Integrated** : 24V-Non dimmable, 24V-PWM  
**Remote** : 24V-0/10V, 24V-DMX, 24V-DALI

 **Integrated** : 230V-Non dimmable


### Material

-  Anodised glazed aluminium
-  Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness

**IK10** Resists impacts up to IK10  
**20J**

**IP67** Tight for temporary immersion

 Adjustable orientation without dismantling