

## 4060 LUMINY 6

«Extra» version in the Luminy spotlight range.

Installs on roads/floors, wall or poles with custom-adaptable accessories.


### APPLICATIONS:

- Architectural heritage enhancement
- Facades lighting
- Tree and vegetation uplighting
- Direct or indirect lighting of public space

### CARACTERISTICS

RGBW options available

- Aluminium body with thermolacquered paint finish, RAL of your choice
- Vandalproof organic glass window
- 316L Stainless screws
- 3-way orientable
- Optional light hood

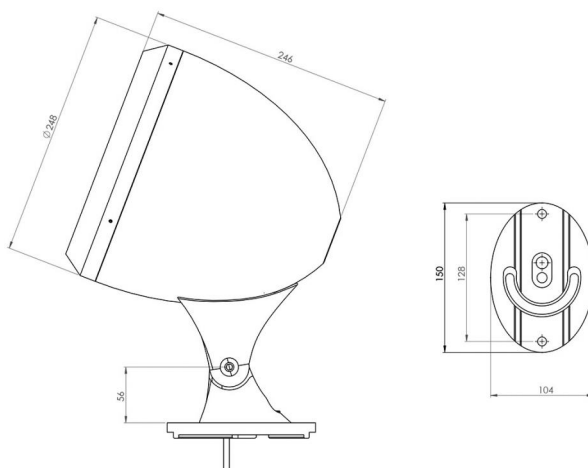

Number of LEDs	36
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/4060-luminy-6-r392>

### APPLICATION



**Outdoor lighting**

Standard flux : **8028 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



Wall lights



Masts

### CARACTERISTICS

Weight : **5300 g**

### Options of luminous effects



RGBW option



Adjustable on 3 axis



Rotating beam



Beam with various openings



Transparent flat window



Colour control system (optional)

### Power supply - Control



Cable length: **5 m**



**Integrated** : 230V-Non dimmable, 230V-0/10V, 230V-DMX, 230V-DALI

### Material



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness



Resists impacts up to IK10



Tight for temporary immersion

## 4060 LUMINY 6

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/4060-luminy-6-r392>

