

4060 LUMINY 6

«Extra» version in the Luminy spotlight range.

Installs on roads/floors, wall or poles with custom-adaptable accessories.


APPLICATIONS:

- Architectural heritage enhancement
- Facades lighting
- Tree and vegetation uplighting
- Direct or indirect lighting of public space

CARACTERISTICS

RGBW options available

- Aluminium body with thermolacquered paint finish, RAL of your choice
- Vandalproof organic glass window
- 316L Stainless screws
- 3-way orientable
- Optional light hood

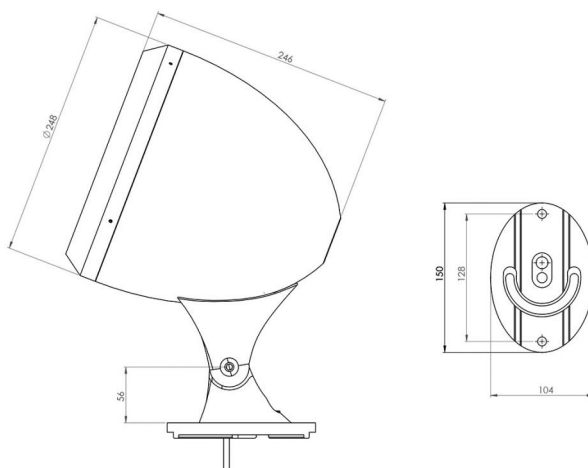

| | |
|----------------|--|
| Number of LEDs | 36 |
| Type of LEDs | Power LEDs. Contact us for hot countries. |
| Color(s) | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/4060-luminy-6-r392>

APPLICATION



Outdoor lighting

Standard flux : **8028 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Wall lights



Masts

CARACTERISTICS

Weight : **5300 g**

Options of luminous effects



RGBW option



Adjustable on 3 axis



Rotating beam



Beam with various openings



Transparent flat window



Colour control system (optional)

Power supply - Control



Cable length: **5 m**



Integrated : 230V-Non dimmable, 230V-0/10V, 230V-DMX, 230V-DALI

Material



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness



IK10 Resists impacts up to IK10



IP67 Tight for temporary immersion

4060 LUMINY 6

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/4060-luminy-6-r392>

