

## 5623 BRUNEI

Recessed lightbar for public spaces. Length on request (max = 2000mm, min = 150mm), can be installed individually or as a continuous line. Clips in with no screws for vandal-proof installation.

### APPLICATIONS:


- Decorative or safety marker-lighting for public spaces
- Highlight facades

### CARACTERISTICS

Uniform lighting

- Vandalproof profiled organic glass
- Colourless anodised aluminium profile (except 5620X)
- Recessed
- 2 Profiled mounts with extruded-aluminium accessories for continuous line or individual installation.
  - Ground-recessed version with internal space for running cable and connectors
  - Compact surface-mounted

- Version RGB options available

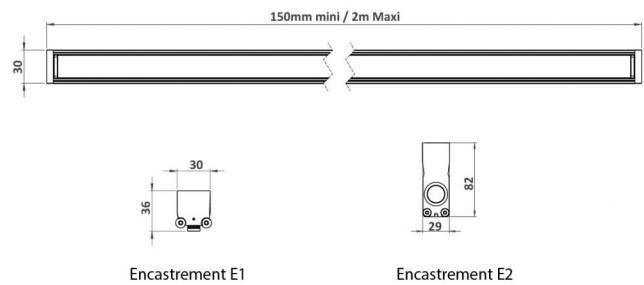

Number of LEDs	120, 70
Type of LEDs	120° SMD LEDs (S), 120° high intensity SMD LEDs (Z), SMD trichro (A)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:  
<http://www.lec-lyon.com/5623z-brunei-r466>

### APPLICATION

-  Marker-lighting

### CONFIGURATEUR.EMPLACEMENT

-  Wall recessed
-  Ground flush recessed fittings
-  Ground recessed fittings
-  Pavements sides
-  Masts
-  Handrails

### CARACTERISTICS

Weight : 730 g/m

#### Options of luminous effects

-  RGB options
-  Non adjustable
-  Flat homogeneous window (optional)
-  Colour control system (optional)

#### Power supply - Control

-  Cable length: Connector

Integrated : 24V-PWM  
 Remote : 24V-0/10V, 24V-DMX, 24V-DALI

#### Material

-  Anodised glazed aluminium
-  Vandalism-proof organic glass

#### Mechanical strength - Waterproofness

-  Withstands 2-wheels traffic
-  Withstands random all vehicles traffic
-  IK10 Resists impacts up to IK10 60J
-  IP68 Tight for extended immersion