

5623 BRUNEI

Recessed lightbar for public spaces. Length on request (max = 2000mm, min = 150mm), can be installed individually or as a continuous line. Clips in with no screws for vandalproof installation.

APPLICATIONS:


- Decorative or safety markerlighting for public spaces
- Highlight facades

CARACTERISTICS

Uniform lighting

- Vandalproof profiled organic glass
- Colourless anodised aluminium profile (except 5620X)
- Recessed
- 2 Profiled mounts with extruded-aluminium accessories for continuous line or individual installation.
 Ground-recessed version with internal space for running cable and connectors
 - Compact surface-mounted
- Version RGB options available



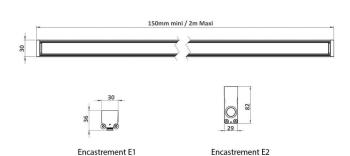

Number of LEDs	120, 70
Type of LEDs	120° SMD LEDs (S), 120° high intensity SMD LEDs (Z), SMD trichro (A)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:


http://www.lec-lyon.com/5623z-brunei-r466


APPLICATION

Marker-lighting

CONFIGURATEUR.EMPLACEMENT







Pavements sides


Masts
Handrails


CARACTERISTICS


Weight: **730 g/m**

Options of luminous effects









Power supply - Control

Cable length: Connector

Integrated: 24V-PWM
Remote: 24V-0/10V, 24V-DMX, 24V-DALI

Material

Anodised glazed aluminium

Vandalism-proof organic glass

Mechanical strength - Waterproofness

Withstands 2-wheels traffic

Withstands random all vehicles traffic

IK10 Resists impacts up to IK10 60J 60J

IP68 Tight for extended immersion