

## 1750K BOURGOGNE

«Mini» version in the round flush recessed raking light range.


### APPLICATIONS:

- Highlight architectural features, street furniture, landscape...
- Surface mounted lighting for cycle path, pedestrian path, stairs
- Squares and public places

### CARACTERISTICS

The flange (3mm) hides recess plate imperfections.  
Colourless anodised machined aluminium body

- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1750K and 1750DS)
- 3 possible recess dimensions
- Withstands occasional traffic from all kinds of vehicles (1750 & 1750H)

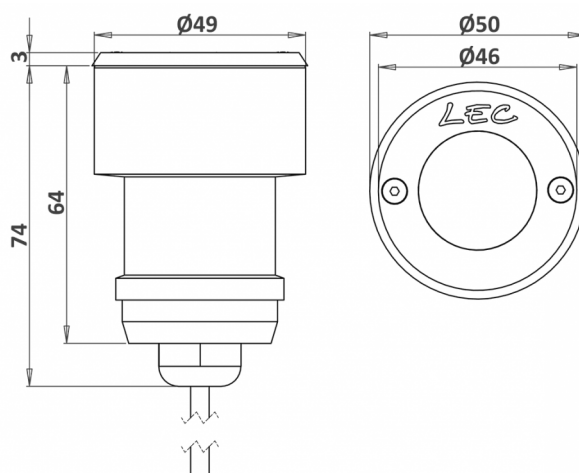

Number of LEDs	1
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1750k-bourgogne-r844>

### APPLICATION



**Outdoor lighting**

Standard flux : **223 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



Ground recessed fittings

### CARACTERISTICS

Weight : **160 g**

### Options of luminous effects



Non adjustable



Transparent flat window



Colour control system (optional)

### Power supply - Control



Cable length: **1 m**



**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

### Material



Anodised glazed aluminium



316L Stainless steel



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness



Resists impacts up to IK10  
**20J**



Tight for extended immersion

## 1750K BOURGOGNE

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/1750k-bourgogne-r844>

