

1750K **BOURGOGNE**

«Mini» version in the round flush recessed raking light range.

APPLICATIONS:


- · Highlight architectural features, street furniture, landscape...
- Surface mounted lighting for cycle path, pedestrian path, stairs
- Squares and public places

CARACTERISTICS

The flange (3mm) hides recess plate imperfections. Colourless anodised machined aluminium body

- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1750K and 1750DS)
- 3 possible recess dimensions
- · Withstands occasional traffic from all kinds of vehicles (1750 & 1750H)



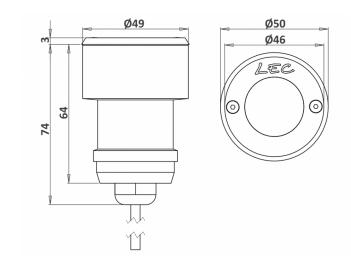

Number of LEDs	1
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

http://www.lec-lyon.com/1750k-bourgogne-r844

APPLICATION

Outdoor lighting

Standard flux: 223 lm

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT

Ground recessed fittings

CARACTERISTICS

Weight : **160** g

Options of luminous effects



(x) Non adjustable



Transparent flat window



Colour control system (optional)

Power supply - Control



Cable length: 1 m

Integrated: 24V-PWM Remote: 24V-0/10V, 24V-DMX, 24V-DALI

Material



Anodised glazed aluminium



316L Stainless steel



Vandalism-proof, scratchproof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

IK10 Resists impacts up to IK10 20J 20J

Tight for extended immersion IP68



1750K BOURGOGNE

This datasheet gives you all the available optics for this product, consistent with the number of LEDs. URL of this product: http://www.lec-lyon.com/1750k-bourgogne-r844

