

1830 LUCERNE

«Medium» version in the round flush recessed raking light range.

APPLICATIONS:

- Highlight architectural features, street furniture, landscapes...
- Surface mounted lighting for cycle path, pedestrian path, stairs
- Squares and public places




CARACTERISTICS

- Anodised aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1830K and 1830D)

Withstands occasional traffic from all kinds of vehicles

- RGBW options available

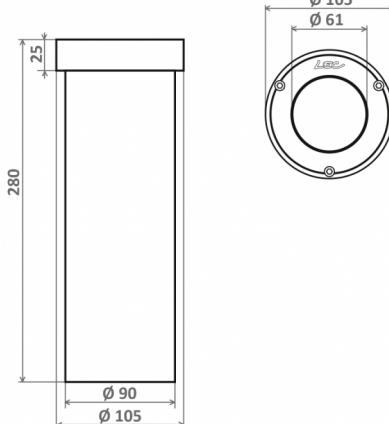

Number of LEDs	4
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1830-lucerne-r850>

APPLICATION

Outdoor lighting

Standard flux : 892 lm

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT

-  Ground flush recessed fittings
-  Ground recessed fittings
-  Pavements sides

CARACTERISTICS

Weight : 415 g

Options of luminous effects

-  RGBW option
-  20° deflected beam (option)
-  Adjustable on 1 axis
-  Beam with various openings
-  Frosted dome (optional)
-  Colour control system (optional)

Power supply - Control

-  Cable length: 1 m

Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI

-  Integrated : 230V-Non dimmable

Material

-  Anodised glazed aluminium
-  Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

-  Withstands random all vehicles traffic
-  IK10 Resists impacts up to IK10 60J
-  IP68 Tight for extended immersion

1830 LUCERNE

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.
 URL of this product: <http://www.lec-lyon.com/1830-lucerne-r850>

