

## 1830D LUCERNE

«Medium» version in the round flush recessed raking light range. Choice of lighting effects for customised LED marker-lighting.

### APPLICATIONS:


- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs
- Public space enhancement

### CARACTERISTICS

The marker-light is equipped with a frosted dome allowing for a distance vision.

- Anodised aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1830K and 1830D)

- RGB options available

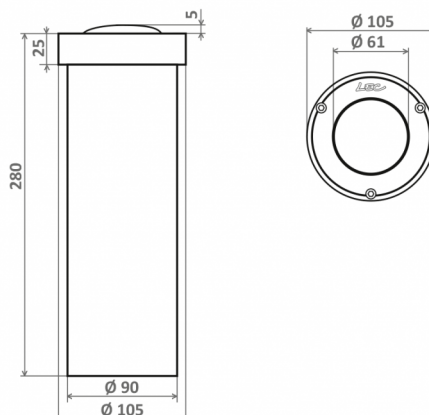


|                |   |
|----------------|---|
| Number of LEDs | 36, 12, 4   |
| Type of LEDs   | 120° SMD LEDs (S), SMD trichro (A), Power LEDs. Contact us for hot countries.   |
| Color(s)       | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T), Royal blue (K) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:  
<http://www.lec-lyon.com/1830dz-lucerne-r853>

### APPLICATION

-  Marker-lighting

### CONFIGURATEUR.EMPLACEMENT

-  Ground recessed fittings





### CARACTERISTICS

Weight : 290 g



### Options of luminous effects

-  RGB options
-  Adjustable on 1 axis
-  Frosted dome (optional)
-  Colour control system (optional)

### Power supply - Control

-  Cable length: 1 m
-  **Integrated** : 24V-PWM
-  **Remote** : 24V-0/10V, 24V-DMX, 24V-DALI
-  **Integrated** : 230V-Non dimmable

### Material

-  Anodised glazed aluminium
-  Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness

- IK10** Resists impacts up to IK10
- 20J**
- IP68** Tight for extended immersion