

## 4040M LUMINY 4

«Maxi» version in the Luminy spotlight range. Installs on roads/floors, wall or poles with custom-adaptable accessories.


### APPLICATIONS:

- Architectural heritage enhancement
- Landscape enhancement
- Path lighting, lanes
- Direct or indirect lighting of public space

### CARACTERISTICS

Adjustable on 3 axis

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- 316L Stainless steel bracket and screws
- Thermolacquered bracket on request
- Optional light hood
- RGBW options available

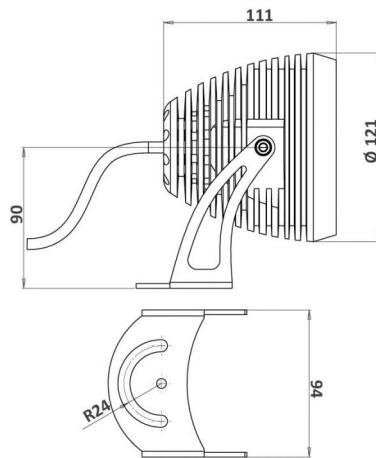

Number of LEDs	12
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/4040m-luminy-4-r875>

### APPLICATION



Outdoor lighting

Standard flux : 2676 lm

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



Wall lights



Masts

### CARACTERISTICS

Weight : 1750 g

### Options of luminous effects



RGBW option



Adjustable on 3 axis



Rotating beam



Beam with various openings



Transparent flat window



Colour control system (optional)

### Power supply - Control



Cable length: 1 m



**Integrated :** 24V-Non dimmable, 24V-PWM, 24V-DMX, 24V-DALI  
**Remote :** 24V-0/10V



**Integrated :** 230V-Non dimmable, 230V-0/10V

### Material



**AL** Anodised glazed aluminium



**PC** Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness



**IK10** Resists impacts up to IK10  
**20J**



**IP68** Tight for extended immersion

## 4040M LUMINY 4

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.  
 URL of this product: <http://www.lec-lyon.com/4040m-luminy-4-r875>

