

## 5533 SOULARY

Cable-suspended spotlight for street lighting.


Orientable beam (+/-10°) without opening the spotlight and without compromising its water resistance.

### APPLICATIONS:

- Cycle paths and pedestrian paths lighting
- Public space lighting

### CARACTERISTICS

- Colourless anodised machined aluminium body
- Aluminium cap with thermolacquered paint finish, RAL of your choice
- Vandalproof organic glass window

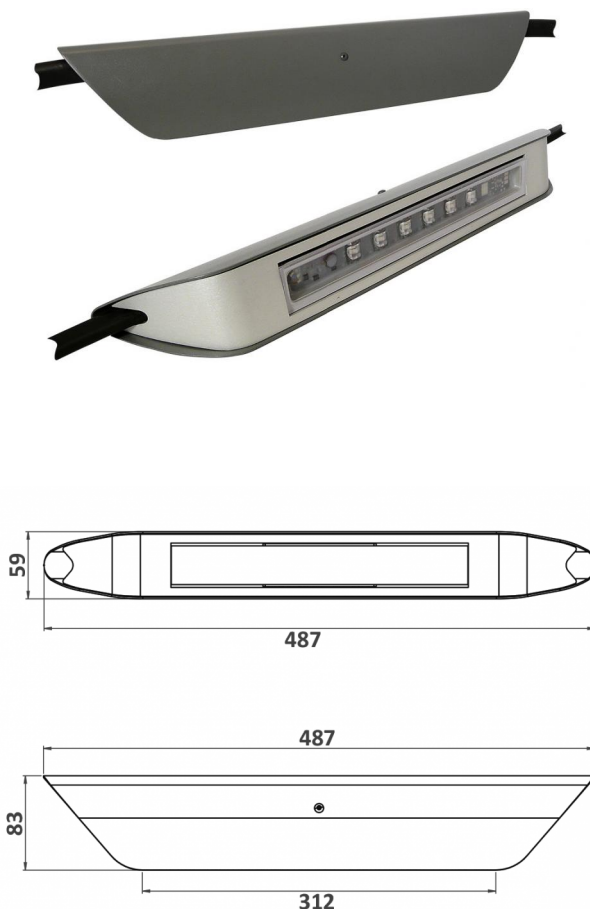

|                |  |
|----------------|--|
| Number of LEDs | 6  |
| Type of LEDs   | Power LEDs. Contact us for hot countries.  |
| Color(s)       | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5533-soulary-r876>

### APPLICATION



#### Outdoor lighting

Standard flux : **1338 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



#### Overhead catenary lights

### CARACTERISTICS

Weight : **1100 g**

### Options of luminous effects

- RGB options
- Adjustable on 1 axis
- Rotating beam
- Beam with various openings
- Transparent flat window
- Colour control system (optional)

### Power supply - Control

- Cable length: **1 m**
- Integrated** : 48V-PWM
- Remote** : 48V-0/10V, 48V-DMX, 48V-DALI

### Material

- Anodised glazed aluminium
- Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness

- IK10** Resists impacts up to IK10
- 20J**
- IP67** Tight for temporary immersion

## 5533 SOULARY

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5533-soulary-r876>

