

## 1530R BORDEAUX


«Mini» version in the round flush recessed raking light range. The flange hides recess plate imperfections.  
For versions with recessed elements, see BOURGOGNE.

### APPLICATIONS:

- Highlight architectural features, street furniture, landscape...
- Surface mounted lighting for cycle path, pedestrian path, stairs
- Squares and public places

### CARACTERISTICS

- Colourless anodised machined aluminium body (except 1530RX)
- Vandalproof organic glass window
- Recess in or attach to walls, bollards, poles or other supports.

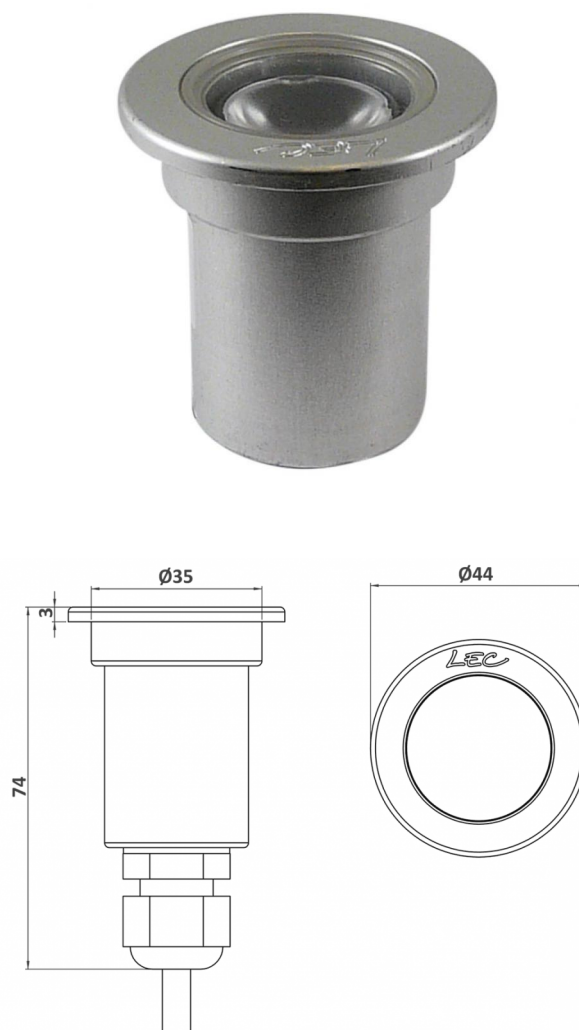

|                |                                                                                                                                                    |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of LEDs | 1                                                                                                                                                  |
| Type of LEDs   | Power LEDs. Contact us for hot countries.                                                                                                          |
| Color(s)       | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1530r-bordeaux-r921>

### APPLICATION



#### Outdoor lighting

Standard flux : **223 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



Pavements sides

### CARACTERISTICS

Weight : **125 g**

### Options of luminous effects



20° deflected beam (option)



Non adjustable



Beam with various openings



Transparent flat window

### Power supply - Control



Cable length: **1 m**



**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

### Material



Anodised glazed aluminium



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness



Resists impacts up to IK10  
**60J**



Tight for extended immersion

## 1530R BORDEAUX

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/1530r-bordeaux-r921>

