

1530R **BORDEAUX**

«Mini» version in the round flush recessed raking light range. The flange hides recess plate imperfections. RGB option available.


APPLICATIONS:

- · Decorative or safety markerlighting
- Installed at regular intervals to mark a path, cycle path, stairs,...
- Public space enhancement

CARACTERISTICS

- Colourless anodised machined aluminium body (except 1530RX)
- Vandalproof organic glass window
- Recess in or attach to walls, bollards, poles or other supports.



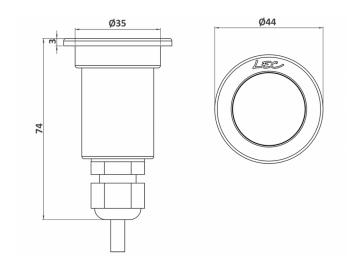

Number of LEDs	3
Type of LEDs	120° SMD LEDs (S), SMD trichro (A)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

http://www.lec-lyon.com/1530rz-bordeaux-r922

APPLICATION

Marker-lighting

CONFIGURATEUR.EMPLACEMENT

Wall recessed



Pavements sides



Masts

CARACTERISTICS

Weight : 125 g

Options of luminous effects



RGB options



(x) Non adjustable



Transparent flat window



Colour control system (optional)

Power supply - Control



Cable length: 1 m

Integrated: 24V-PWM Remote: 24V-0/10V, 24V-DMX, 24V-DALI

Material



(AL) Anodised glazed aluminium

Vandalism-proof, scratchproof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

IK10 Resists impacts up to IK10

60J 60J

Tight for extended immersion IP68