

1750 BOURGOGNE

«Mini» version in the round flush recessed raking light range. Choice of lighting effects for customised marker-lighting.
RGB options available.


APPLICATIONS:

- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs
- Public space enhancement

CARACTERISTICS

Colourless anodised machined aluminium body

- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1750K and 1750DS)
- 3 possible recess dimensions
- Withstands occasional traffic from all kinds of vehicles (1750 & 1750H)

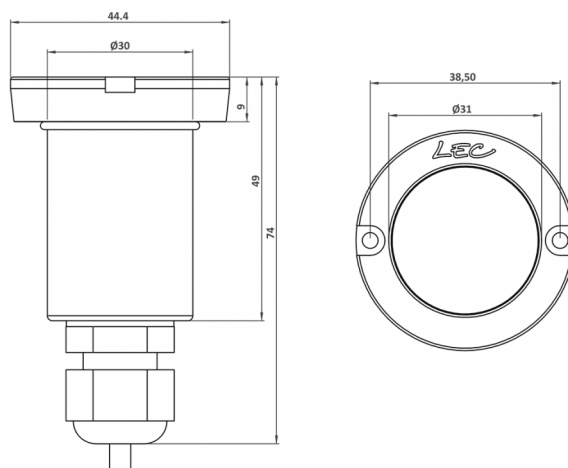

Number of LEDs	3
Type of LEDs	120° SMD LEDs (S), SMD trichro (A)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T)




Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1750z-bourgogne-r925>

APPLICATION

-  Marker-lighting

CONFIGURATEUR.EMPLACEMENT

-  Ground flush recessed fittings
-  Ground recessed fittings
-  Pavements sides




CARACTERISTICS

Weight : 120 g



Options of luminous effects

-  RGB options
-  Non adjustable
-  Transparent flat window
-  Colour control system (optional)




Power supply - Control

-  Cable length: 1 m
-  Integrated : 24V-PWM
-  Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

-  Anodised glazed aluminium
-  Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

-  Withstands random all vehicles traffic
-  Resists impacts up to IK10 60J
-  Tight for extended immersion