

## 5632 ARCHES

This compact linear spotlight is designed to be installed on a windowsill or facade belt-course. Fitted with an 100x12° lens, the uprights and lintel of the windowframe will be illuminated without emitting any unwanted-beams.

For installation on an architectural belt-course, the choice of available lenses allows upward converging beams or uniform wall-washing of the facade despite being installed very close to the facade.


### APPLICATIONS:

- Windowframe lighting
- Wallwashing
- Architectural heritage enhancement
- Path lighting
- Direct or indirect lighting of public space

### CARACTERISTICS

"Mini" version with 3 LEDs

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Thermolacquered paint on request

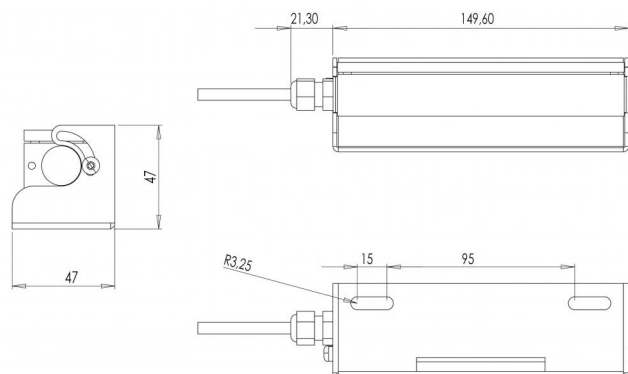

Number of LEDs	3
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5632-arches-r2446>

### APPLICATION



#### Outdoor lighting

Standard flux : **669 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



#### Wall lights

### CARACTERISTICS

#### Options of luminous effects

- ① Adjustable on 1 axis
- Rotating beam
- Beam with various openings
- Transparent flat window

#### Power supply - Control

Cable length: **1 m**

**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

#### Material

- AL Anodised glazed aluminium
- PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

#### Mechanical strength - Waterproofness

**IK10** Resists impacts up to IK10  
**20J**

**IP67** Tight for temporary immersion

## 5632 ARCHES

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5632-arches-r2446>

